

Motorlüfterrad einflutig

Motorized impeller single inlet

RH40M-4EK.4F.1R

Art.Nr. mit Kabelbox
Art.no. with supply cable adapter

112 999




Leistungsdaten Performance data

1~ 230V ±10%
50Hz IP54

Anschlussschaltbild 104XA
Connection diagram

P ₁	0,49	kW
I	2,2	A
n	1350	min ⁻¹
I _A	5,0	A
ΔI	15	%
C _{400V}	10	μF
t _R	40	°C
m	8,3	kg

Kennliniendaten Characteristic data

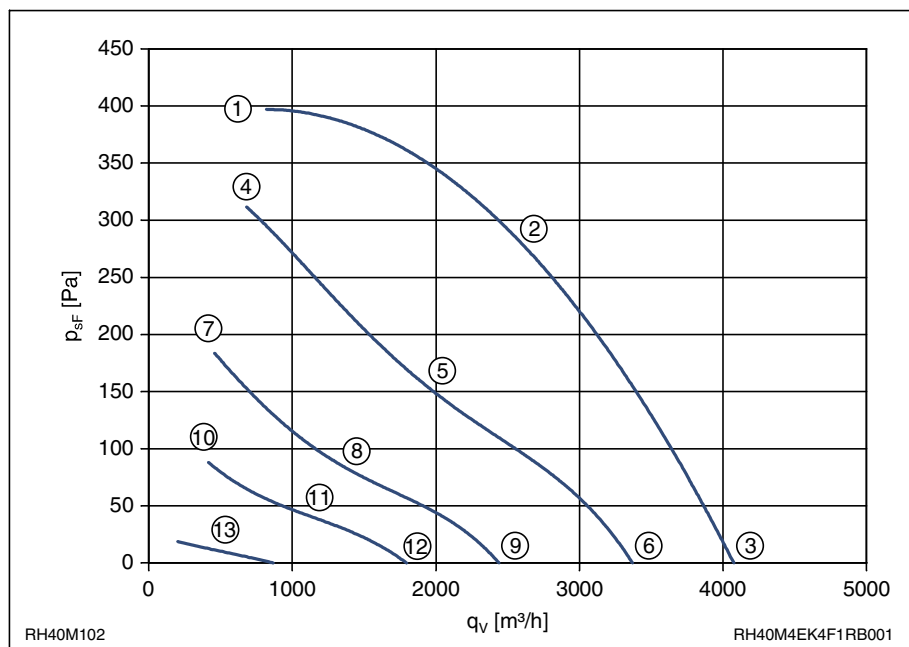

	U V	I A	P ₁ W	n min ⁻¹	L _{WA} dB
①		1,8	390	1400	
②	230	2,2	490	1350	71
③		2,0	440	1380	77
④		1,9	300	1250	
⑤	160	2,5	350	1010	64
⑥		2,2	330	1140	73
⑦		2,0	230	960	
⑧	130	2,2	250	730	59
⑨		2,1	240	830	68
⑩		1,8	160	670	
⑪	105	1,85	160	540	53
⑫		1,8	160	620	63
⑬	60	1,05	51	270	

$$p_{d2} = 1,55 \cdot 10^{-6} \cdot q_v^2$$

SONDERAUSFUEHRUNG AUF ANFRAGE
MIT KABEL SEITLICH ODER MIT KLEMMENKASTEN /
SPEZIAL DESIGN ON REQUEST
WITH CABLE SIDE OR WITH TERMINAL BOX

